



# NRH

NEMA 4X LED MR16 Remote Head

DATE:

PROJECT

COMMENTS:

## FEATURES

- NEMA 4X rating makes this ideal for use in outdoor and wet locations.
- Unique flex arm design allows for up and down movement, as well as side to side.
- Intertek verified splash zone listing ensures no damage is done in an environments where it may get splashed with liquids.
- Rated for -22°F to 104°F.
- Fits most standard junction boxes.
- Optional LED heads are available.
- Able to be mounted on a surface, ceiling, or wall.
- Certified NSF Standard 2 - meets the rigorous sanitation, electrical safety, and performance requirements of food service environments.



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS

Only available with Adobe Acrobat and Acrobat Reader

## ORDERING INFORMATION NRH-GY-1-L65

1. SERIES	2. HOUSING COLOR	3. HEAD COUNT	4. LAMP SOURCE <sup>1</sup>	5. OPTIONS
NRH	GY GY Gray Aluminum	1 One Lamp 2 Two Lamps	L65 LED 6V 5W L67 LED 6V 7W L122 LED 12V 2W L125 LED 12V 5W L127 LED 12V 7W L245 LED 24V 5W L247 LED 24V 7W	BLANK = NO OPTION LF Food-Prep lens (Shatter-resistant coating)

### ORDERING NOTES

1. Additional lamp options may be available, please contact [Quotes@Isolite.com](mailto:Quotes@Isolite.com) if non-LED lamps are required.

## ACCESSORIES; ORDER SEPARATELY

- **WG-16.5LX14.0WX3.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 3"
- **WG-16.5LX14.0WX6.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 6"
- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

## SPECIFICATIONS

### CONSTRUCTION

- Die cast aluminum head
- Weatherproof, powder-coated aluminum canopy
- Resilient gasketing enables unit to withstand exposure to moisture and corrosive elements
- Glass lens will not yellow over time

### APPROVALS

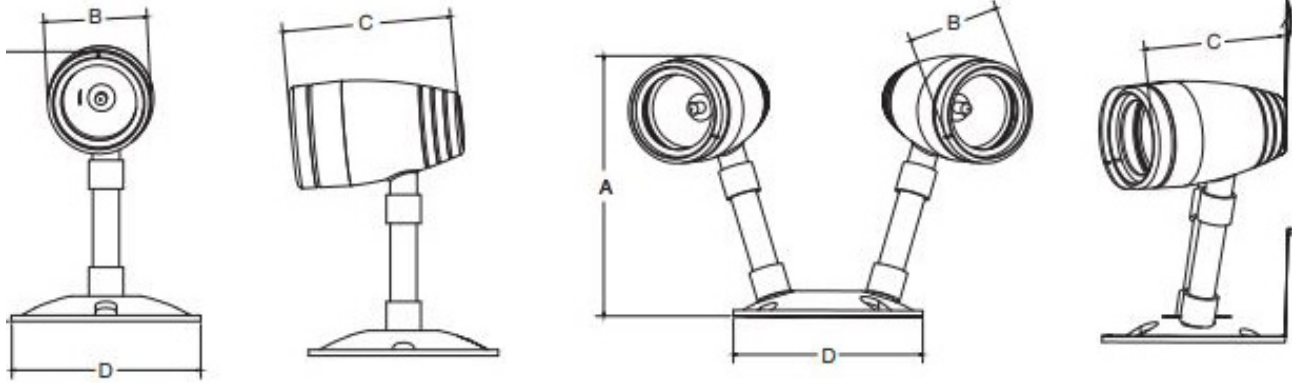
- NEMA 4X
- IP66
- Sanitation Listed
- UL 924
- CSA-US Listed
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- BAA Compliant

### WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

### TEMPERATURE RATING

- From -22°F to 104°F


**DIMENSIONS**


DIMENSIONS				
	A	B	C	D
Single Head	5.875"	2.25"	3.688"	4.125"
Double Head	5.625"	2.25"	3.688"	4.125"

**LAMP SPACING**

UNIT SPACING - 9 FT MOUNTING HEIGHT	
LAMP WATTAGE	SPACING (MULTIPLE UNITS)
2W	50'
5W	60'
7W	100'