

DATE:	COMMENTS:
PROJECT:	



## FEATURES

- Very low profile extruded aluminum housing and mount bracket blend seamlessly with structural metal frames
- Remote power supply for 10W and 20W EM and AC model single fixtures
- Certified IP66 housing withstands multi direction water spray and fine dust ingress
- Universal side or top mount
- Wide lighting distribution designed for entrance walkways
- 10W or 20W emergency power models
- Option for 20W models to operate for 2 hours in emergency mode
- Standard CCT 5000K, with 2900K, 3200K and 3800K options available
- 10W version with 546 lumen output
- 20W version with 1155 lumen output

## ORDERING INFORMATION *ODLM-10-AC-BA-MBB*

1. SERIES	2. VA RATING	3. OPERATION	4. HOUSING COLOR
ODLM	10 10 Watt 20 20 Watt	AC AC Only EM Battery Backup	BA Brushed Aluminum BK Black BZ Bronze WH White
5. MOUNTING	6. OPTIONS		
MMT Mullion Mount Top MMR Mullion Mount Rear	BLANK = NO OPTION SD Self-Diagnostics C1 Dual Circuit (120V) C2 Dual Circuit (277V) EB 2 Hour Runtime 2900K 2900K Lens Filter 3200K 3200K Lens Filter 3800K 3800K Lens Filter	NL120 Nightlight (120V Non SD Version) NL277 Nightlight (277V Non SD Version) NLX Nightlight (SD Version)	

## CONSTRUCTION

- Extruded aluminum lamp housing 2" diameter, with gasketed mount bracket only
- Waterproof compression seal for universal wall or top mount
- Gasketed, molded end caps and sealed acrylic lens
- Stainless steel hardware

## ELECTRONICS

- Line latch circuit prevents unwanted emergency activation at installation.
- Low Voltage Disconnect prevents deep battery discharge

## TEMPERATURE RATING

- **EM:** Backup Battery: -4°F to 104°F
- **AC:** No Backup Battery: -4°F to 104°F

## APPROVALS


- UL 924
- NFPA 101 Life Safety Code
- IP66

## WARRANTY


Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

**MOUNTING DIMENSIONS**
**Remote Power Supply**

10W AC &amp; EM Models

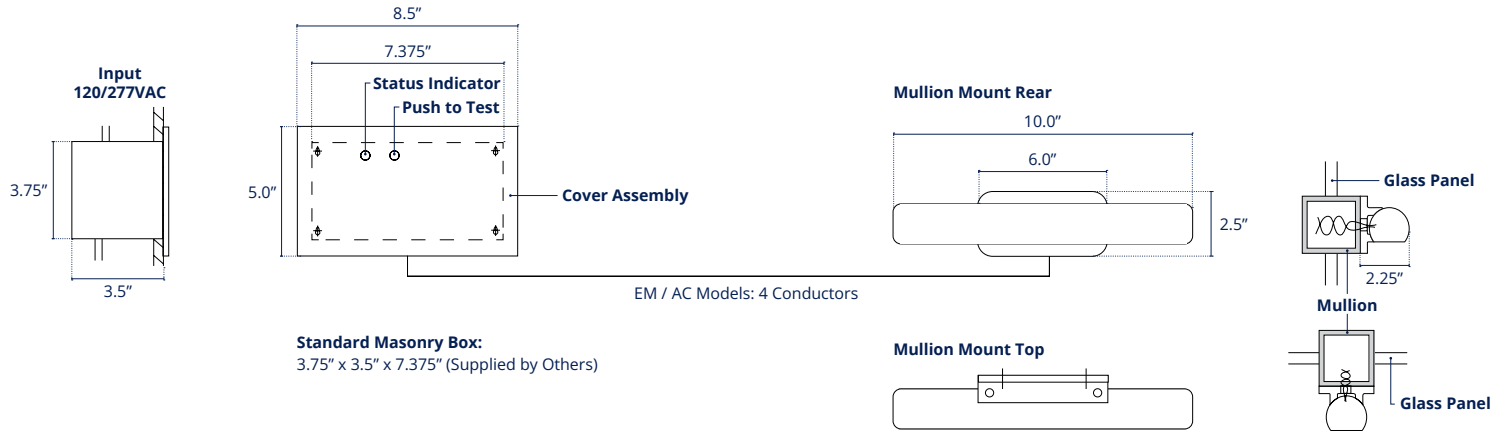
**Remote Power Supply**

20W AC &amp; EM Models

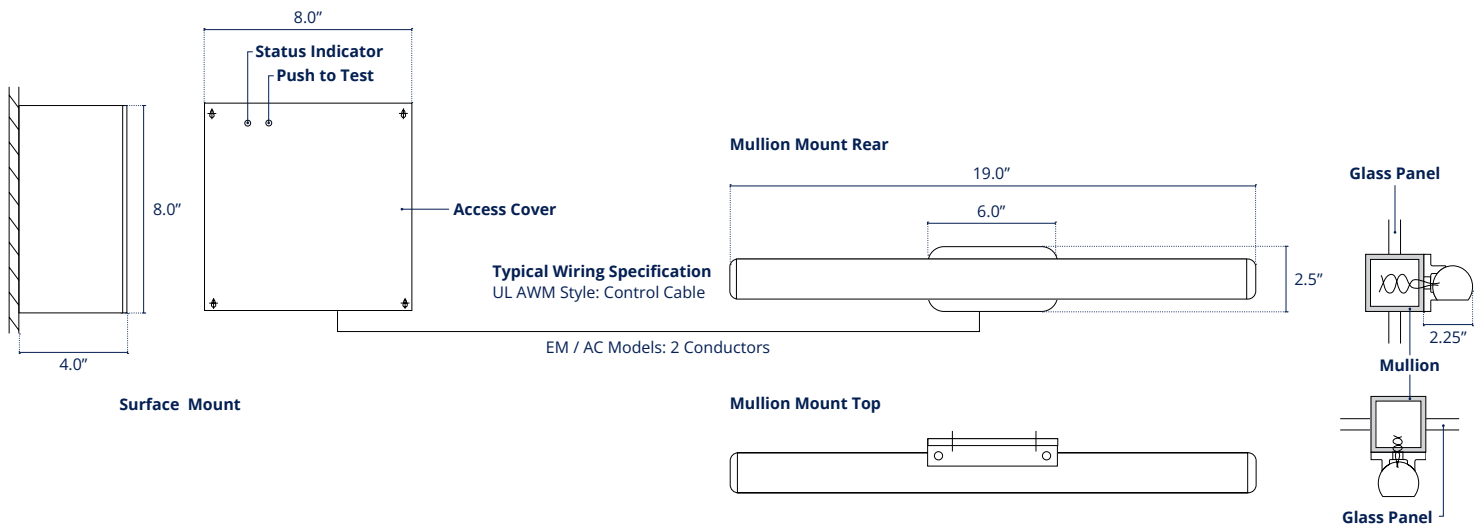

MAXIMUM WIRING LENGTH FROM POWER SUPPLY TO FIXTURE		
WIRING SIZE AWG	LENGTH (FT)	
	10W UNIT	20W UNIT
#22		20
#20	12	40
#18	25	60
#16	50	100
#14	75	160
#12	125	250