



XRH

MR16 Remote Head

DATE:

PROJECT

COMMENTS:

FEATURES

- Rotary locking collar securely locks the lens and reflector assembly into place.
- Innovative design allows for quick and easy relamping.
- Fits most standard junction boxes.
- Swivel lock secures adjustable head in place.
- Able to be mounted on a surface, ceiling, or wall.



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS

Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION *XRH-BK-1-L67*

1. SERIES

XRH

2. HOUSING COLOR

BK Black
WH White

3. HEAD COUNT

1 One Lamp
2 Two Lamps
3 Three Lamps

4. LAMP SOURCE¹

L67 LED 6V 7W
L127 LED 12V 7W

ACCESSORIES; ORDER SEPARATELY

- **WG-16.5LX14.0WX3.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 3"
- **WG-16.5LX14.0WX6.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 6"
- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

SPECIFICATIONS

CONSTRUCTION

- Cast aluminum alloy with steel canopy
- Glass lens will not yellow over time

TEMPERATURE RATING

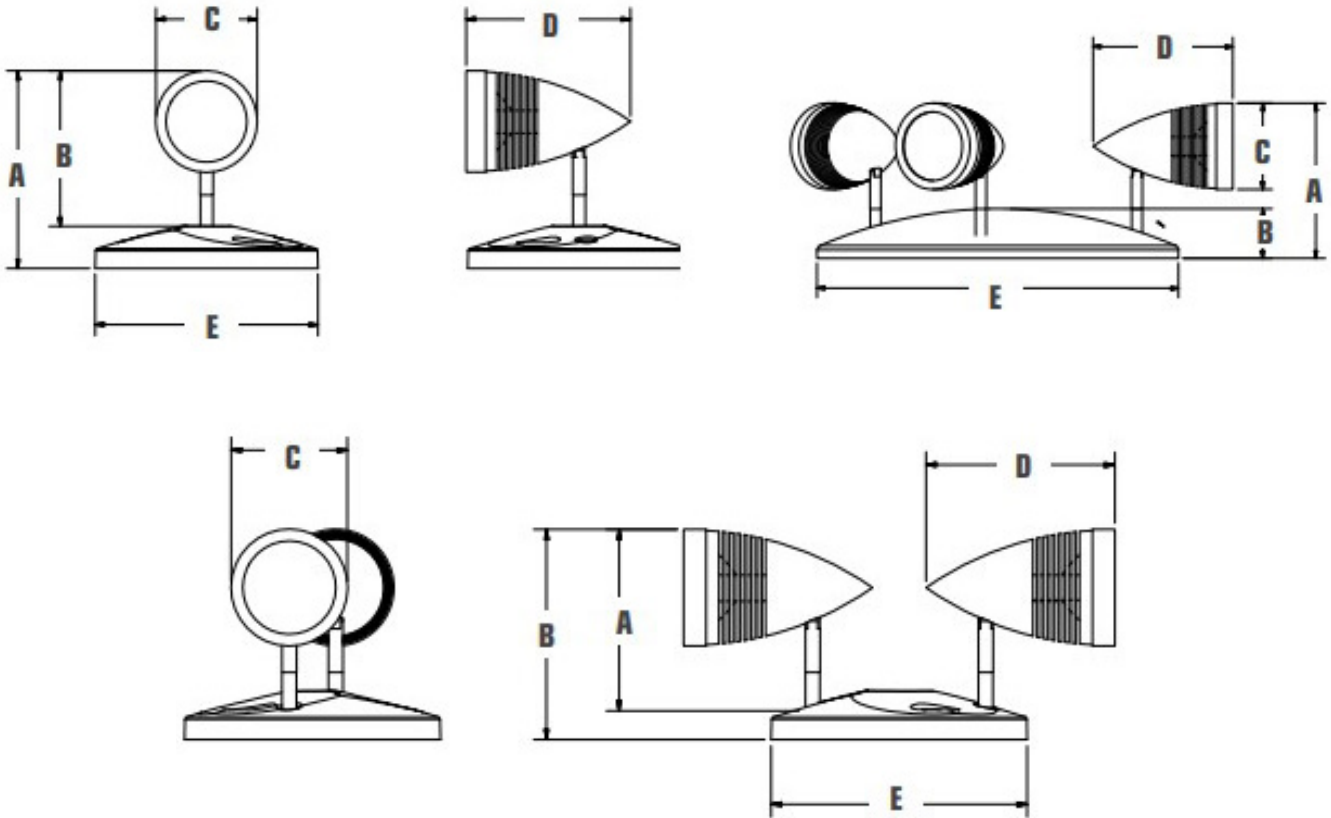
- From -22°F to 104°F

APPROVALS

- CSA-US Listed
- Tested to UL 924 Standards
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.

DIMENSIONS


DIMENSIONS					
	A	B	C	D	E
Single Head	4.375"	3.5"	2.25"	3.75"	5"
Double Head	4.125"	3.5"	2.25"	3.75"	5"
Triple Head	4.125"	1.25"	2.25"	3.75"	9.5"

LAMP SPACING

UNIT SPACING - 9 FT MOUNTING HEIGHT	
LAMP WATTAGE	SPACING (MULTIPLE UNITS)
2W	50'
5W	60'
7W	100'