



VTF-LED

IP66 Rated LED Industrial Luminaire

DATE:

PROJECT:

COMMENTS:

FEATURES

- Corrosion, flame and vandal resistant wet location luminaire.
- Ideal illumination for canopies, warehouses, schools, breezeways and service corridors.
- UV stabilized polycarbonate, liquid silicone perimeter gasket with memory retention.
- Frosted UV stabilized polycarbonate diffuser eliminates glare and provides even light distribution.
- Standard surface mount configuration.
- Available in 3500K, 4000K, or 5000K.
- Available in 100V-277V or 347V-480V input voltages.
- Up to 7,594 lumen output.



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS
Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION VTFLED-4-AC-LO-WT30-120/277V-AC

1. SERIES	2. SIZE	3. OPERATION	4. OUTPUT	5. COLOR TEMPERATURE
VTFLED	4	AC AC Only EM Ni-Cad Battery Backup	LO Low Output ² HO High Output	WT30 3000K WT40 4000K WT50 5000K
4 4 Feet				
5. INPUT VOLTAGE	6. MOUNTING	7. OPTIONS		
120/277V 120-277V 347/480V 347-480V	AC Aviation Cable ³ CH Chain Hang Kit ⁴ DPK Double Pendant Kit ⁴ JM Junction Mount ⁵ PM Pivot Mount	QMB Quick Mount Bracket ⁶ SPK Single Pendant Kit ⁴ SVLDPK Swivel Double Pendant Kit ⁴ SVLSPK Swivel Single Pendant Kit ⁴ TM Trunnion Mount ⁴	BLANK = NO OPTION BK Black Housing ⁷ WH White Housing ⁷ CRD 18AWG, 3-Conductor Cord ⁸ DALI DALI EOS External Occupancy Sensor ⁹	FA Fully Assembled ¹⁰ FP Fuse Protection (3A) SP Surge Protection (10KA) SS Stainless Steel Clips TP Tamperproof Screws

ORDERING NOTES

- Emergency pack 120-277V; 10W/1440 lm.
- No DLC for LO.
- Specify length for AC: 50", 72", 100", 150", 250" fully adjustable.
- SPK, DPK, CH, TM, SVLDPK, & SVLSPK options must specify length.
- JM option - the unit is no longer wet location, but damp location.
- QMB must be used with JM.
- Contact factory.
- Specify length for CRD.
- Select CRMB 9 or SBOR family.
- Includes latches and grommets installed at the factory. Can be combined with the JM option.

LAMP OUTPUT

LAMP TYPE	LUMEN OUTPUT	CRI	L70 (HOURS)
1L50(3500K) 50W LED 3500K	4744	>80	60,000+
1L50(4000K) 50W LED 4000K	5041	>80	60,000+
1L50(5000K) 50W LED 5000K	5041	>80	60,000+
1L70(3500K) 70W LED 3500K	7594	>80	60,000+
1L70(4000K) 70W LED 4000K	7726	>80	60,000+
1L70(5000K) 70W LED 5000K	7919	>80	60,000+

SPECIFICATIONS

CONSTRUCTION

- Corrosion, flame and vandal resistant housing
- 100% UV stabilized polycarbonate, liquid silicone perimeter gasket
- The frosted UV stabilized polycarbonate diffuser

OUTPUT

- LO: 4744 - 5041 lm
- HO: 7594 - 7919 lm

TEMPERATURE RATING

- AC Only: -40°F to 104°F (-20°C to 40°C)
- EM Backup: 32°F to 104°F (0°C to 40°C)

WEIGHT

- 9 lbs


APPROVALS

- IK05
- IP66
- CEC Title 20 Compliant
- Title 24
- DLC
- ETL
- CSA-US listed
- RoHS Compliant
- BAA Compliant


WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.


DIMENSIONS

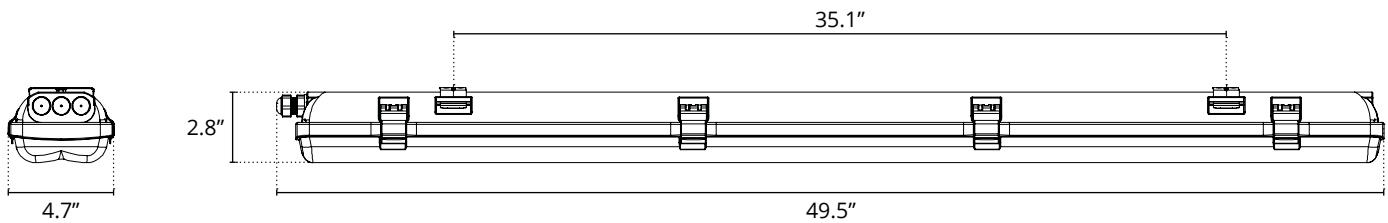


MOUNTING OPTIONS




Surface Mount
(Standard)




Aviation Cable




Single Pendant Kit




Double Pendant Kit




Swivel Single
Pendant Kit




Swivel Double
Pendant Kit




Chain Hang Kit




Trunnion Mount



Pivot Mount

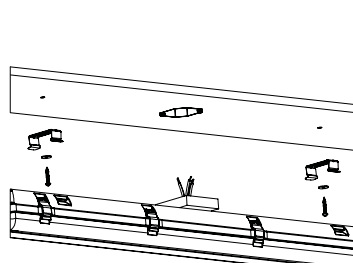

Junction Mount

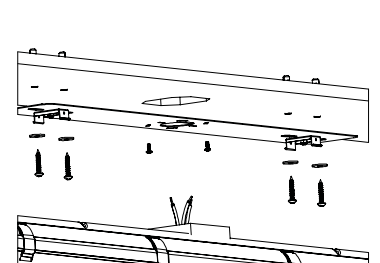

Quick Mount Bracket