

DATE:	COMMENTS:
PROJECT:	



FEATURES

- Two lamp heads are fully adjustable and draw 1.5W each.
- 154 lumens per unit.
- Universal mounting canopy included for ceiling mounting: universal, single, or double face.
- Quick-fit, snap-in installation with field selectable chevron directional indicators.
- Long life, high intensity LED array available in red or green.
- Approved for use in damp locations.
- Maintenance free, 3.6V nickel cadmium batteries provide 90 minutes of run time
- Up to 2.5W remote capability with option to power remote heads if needed (two heads maximum).
- Meets CSA C22.2 No. 141-02.



ORDERING INFORMATION *CMB-EM-R-U-WH-MTEBP-L1*

1. SERIES CMB	2. OPERATION EM EM Ni-Cad Battery Backup	3. LETTER COLOR R Red G Green	4. FACE COUNT U U Universal	5. HOUSING COLOR BK Black WH White
6. MOUNTING MTEBP MTEBP Universal Mount	7. LAMP SOURCE L1 L1 LED 1.5W	8. OPTIONS BLANK = NO OPTION SD Self-Diagnostics EB Remote Capacity ¹	ORDERING NOTES 1. If using the remote capacity option without any remote lamp heads attached, the base unit run time is extended to greater than 2 hours.	

ACCESSORIES; ORDER SEPARATELY

- WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

NOTE: Wireguards only available with Back Mount.

SPECIFICATIONS

CONSTRUCTION

- High impact housing designed with injection molded 5VA flame retardant thermoplastic.

ELECTRONICS

- Electronic control circuit and isolation transformer provide current control and circuit protection, ensuring optimum LED efficiency and life.
- 120/277 VAC with field selectable inputs.
- Solid state transfer relay utilized for reliability.

LETTERS

- 6" high; 0.75" stroke

WEIGHT

- 3.7 lbs

TEMPERATURE RATING

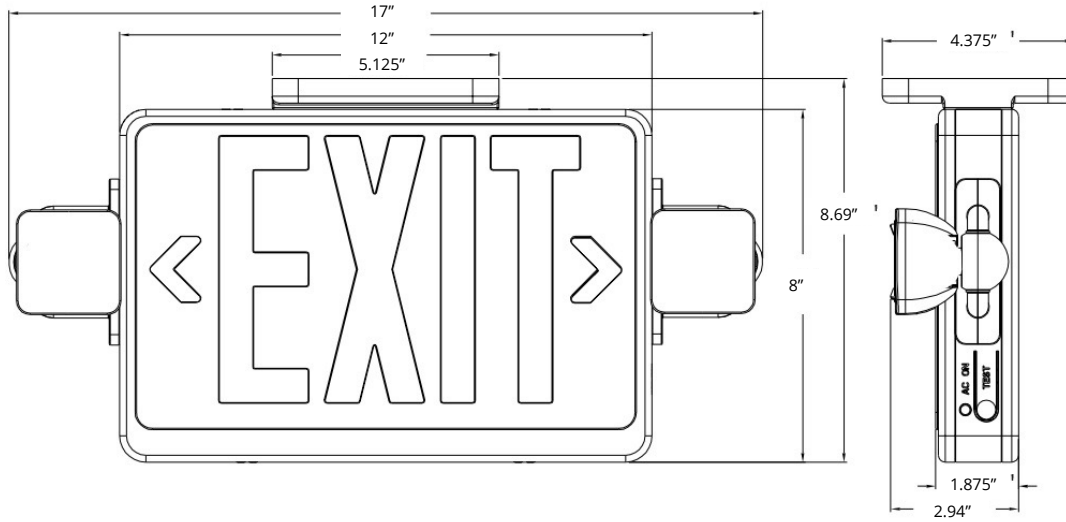
- From 32°F to 122°F

APPROVALS

- UL 924
- NFPA Life Safety Code 101
- NFPA 70-NEC
- OSHA
- Damp Location Listed
- CEC Title 20 Compliant

WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted

DIMENSIONS

LAMP SPACING

MOUNTING HEIGHT (FT)	CENTER-TO-CENTER SPACING (MULTIPLE UNITS - FT)	OPTIMAL AIMING ANGLE FROM GROUND
7	32	20°
8	30	20°
9	29	20°
10	28	20°
11	27	20°
12	26	20°
13	25	20°
14	24	20°
15	23	20°
16	22	20°
17	21	20°
18	19	20°
19	18	20°
20	17	20°