

DATE:

PROJECT

COMMENTS:

FEATURES

- Includes two, top-mounted lighting heads that can be field modified for side-mount applications
- Keyhole mounting slots and conduit knockouts are provided for additional mounting possibilities
- UL listed 90 minute run-time
- Maintenance free, sealed lead calcium battery
- Snap fit door secured by nickel plated steel counter sunk screws
- Captive battery restraints are standard and suit ZONE 4 type applications
- Momentary test switch and AC status indicator
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge
- Brownout sensing ensures emergency operation during periods of low line voltage
- 120/277 VAC field-selectable inputs



ORDERING INFORMATION *ELP-6V28W-MB-2-W67*

1. SERIES	2. OPERATION	3. MOUNTING	4. HEAD COUNT	5. LAMPS	6. OPTIONS
ELP	-	MB	2	-	-
	6V50W 6 Volts, 50 Watts 6V100W 6 Volts, 100 Watts 12V50W 12 Volts, 50 Watts 12V100W 12 Volt, 100 Watt	MB Back Mount	2 Two Heads	See Lamp Chart for Part # Example: WEDGE 6V7W = "W67"	BLANK = NO OPTION HX Internal Heater - 120/277VAC (-9°C — 40°C)

CONSTRUCTION

- Injection molded ABS housing

TEMPERATURE RATING

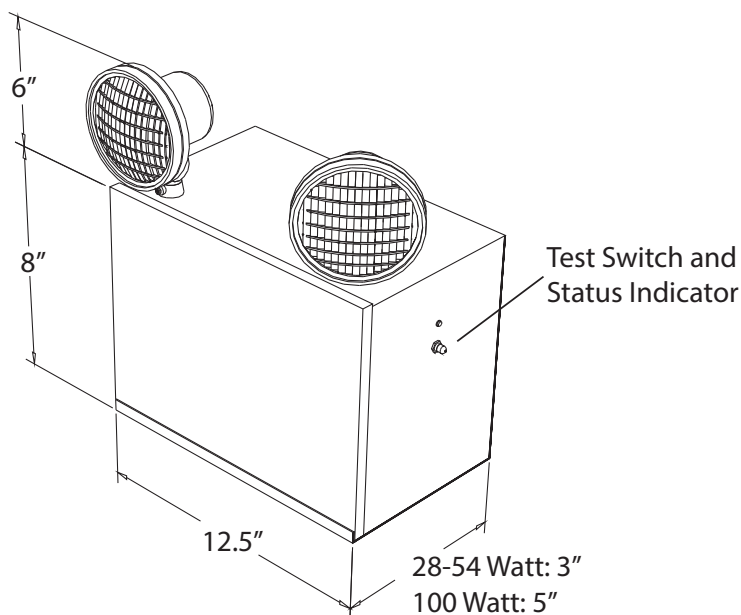
- From 68°F to 104°F

APPROVALS

- UL924
- UL924 Damp Location
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA

WARRANTY

- Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted

DIMENSIONS

LAMP CHARTS

H - SEALED BEAM HALOGEN	
	12V
20W	H1220

W - WEDGE BASE		
	6V	12V
7W	W67	W127
9W		W129