

ELPWL

Wet Location LED Thermoplastic Emergency Light

DATE:

COMMENTS:

PROJECT

FEATURES



- Includes two adjustable 2W LED lighting heads.
- UL Listed for wet location and cold weather installations
- Includes 3.7W remote capacity.
- UL listed for a minimum run-time of 90 minutes.
- Utilizes a premium maintenance-free NiCd battery.
- Snap fit door is secured by nickel plated steel counter sunk screws.
- Momentary test switch and AC status indicator are used to monitor normal and emergency power operation.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge.
- Brownout sensing ensures emergency operation during periods of low line voltage.
- 120/277 VAC with field selectable inputs.



ORDERING INFORMATION *ELPWL-9V6W-BK-MB-2-L92*

1. SERIES	2. OPERATION	3. HOUSING COLOR	4. MOUNTING	5. HEAD COUNT	6. LAMPS
ELPWL	9V6W	BK	MB	2	L92
	9V6W 9 Volts, 6 Watts	BK Black GY Grey	MB Back Mount	2 Two Heads	L92 9.6 Volts, 2 Watts

SPECIFICATIONS

CONSTRUCTION

- Injection Molded ABS housing with a 5VA flame retardant thermoplastic rating.

TEMPERATURE RATING

- From -4°F to 122°F


APPROVALS

- UL 924
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- UL Wet Location Listed

WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

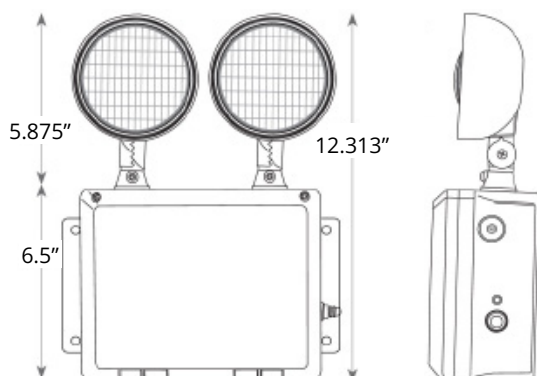

ACCESSORIES; ORDER SEPARATELY

- **WG-20.0LX19.0WX9.0D**
Wireguard, Length: 20", Width: 19", Depth: 9"