

EU-CTMA

Connecticut & Massachusetts Compliant Indoor Mobility Exit Sign

DATE:

COMMENTS:

PROJECT

FEATURES

- Includes a 6" International Symbol of Accessibility or Dynamic Symbol of Accessibility
- Long life Nickel Cadmium maintenance free battery provides the required 90 minutes of emergency operation
- Electronic Control Circuit and Isolation Transformer provide current control and circuit protection, ensuring optimum LED efficiency and life
- Solid state transfer relay ensures reliability-no relay contacts to oxidize and fail
- External LED monitor light and test switch are standard on self-powered versions
- High-output, energy efficient LED technology
- Line-Latch prevents unnecessary discharge of battery
- Brownout detection ensures emergency operation during periods of low line voltage
- LED AC present indicator and push-to-test switch
- 120/277 VAC field-selectable inputs
- Option of "International Symbol of Accessibility" available



SYMBOL KEY



DSA = Dynamic Symbol of Accessibility (CT)



ISA = International Symbol of Accessibility (MA)

ORDERING INFORMATION *EU-CTMA-AC-G-1C-DSA-BK-MBC*

1. SERIES	2. BATTERY TYPE	3. ILLUMINATION	4. SYMBOL	5. FACE COUNT
EU-CTMA	-	-	-	-
	AC AC Only EM Ni-Cad Backup Battery	G Green R Red	DSA Dynamic Symbol of Accessibility (CT) ISA International Symbol for Accessibility (MA)	1C Single Face, Clear Background 1M Single Face, Mirror Background 1W Single Face, White Background 2M Double Face, Mirror Background 2W Double Face, White Background
6. FRAME COLOR	7. MOUNTING	8. OPTIONS		
BK Black BA Brushed Aluminum WH White	MBC Back/Ceiling Mount ME End Mount / Side Mount MPAB 12" Swivel Pendant Kit (Black) MPABA 12" Swivel Pendant Kit (Brushed Aluminum) MPAW 12" Swivel Pendant Kit (White)	BLANK = NO OPTION EB Extended Run Time (EM Only)		

ACCESSORIES; ORDER SEPARATELY

- WG 6 = Wire guard 20.0" X 17.0" X 12.0"

LETTERS

- 6" high; 0.75" stroke

ARROWS

- NFPA-Type, universal field selectable chevrons

HOUSING CONSTRUCTION

- Durable die-cast aluminum
- White-baked powder coat finish Panel Construction
- High clarity acrylic

WEIGHT

- 7 lb

TEMPERATURE RATING

- From 50°F to 113°F


APPROVALS

- CSA-US listed
- Meets or exceeds UL 924 standards
- State of Connecticut Building Code Paragraph 1011.1.2
- NFPA 101 Life Safety Code
- NFPA 70- NEC
- OSHA


WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted

DIMENSIONS

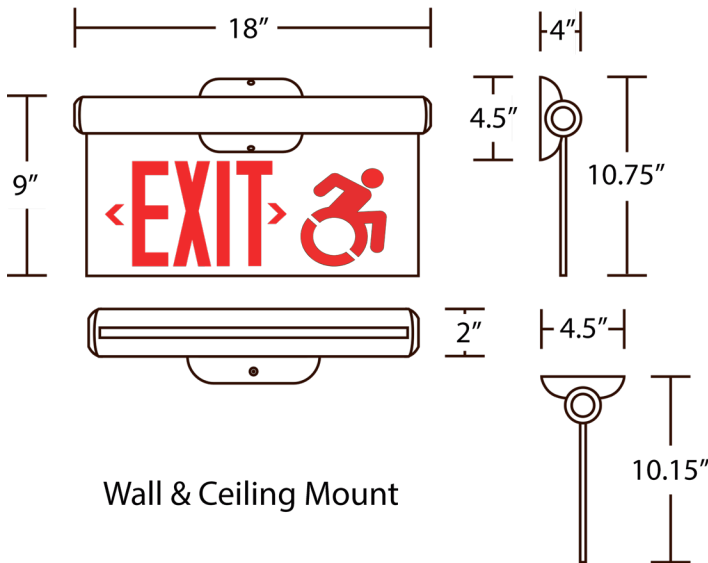

Wall & Ceiling Mount

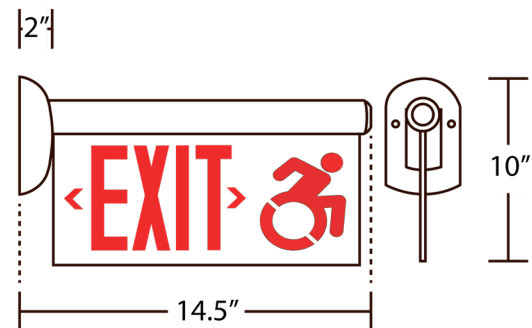

End Mount