



EUG

Universal Surface Mount Edge-lit LED Exit Sign

DATE:

PROJECT

COMMENTS:

FEATURES

- Super-bright LEDs with long life expectancy.
- Suitable for damp locations.
- Unique pivoting housing suitable for ceiling, wall, or end mount applications.
- The energy consumption is less than 2 watts of nominal power.
- Charge rate/power "ON" LED indicator light and push-to-test switch are provided for mandated code compliance testing.
- Maintenance free nickel cadmium batteries with long life expectancy.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Full automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours while reducing overcharge and improving the life of the battery.
- Brownout detection ensures emergency operation during periods of low line voltage.
- 120/277 VAC with field selectable inputs.

CEC Title 20



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS

Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION EUG-AC-G-1C-MPA

1. SERIES	2. OPERATION TYPE	3. ILLUMINATION	4. FACE COUNT	5. MOUNTING
EUG	-	-	-	-
	AC AC Only EM Ni-Cad Battery Backup	G Green R Red	1C Single Face, Clear Background 2M Double Face, Mirror Background	MTEB Top/End/Back Mount MPA 12" Swivel Pendant Kit MPB 24" Swivel Pendant Kit MPC 36" Swivel Pendant Kit MPD 48" Swivel Pendant Kit

ACCESSORIES; ORDER SEPARATELY

- EUNR1M = Conversion Panel, Single Face, Red Letters, Mirror Background
- EUNG1M = Conversion Panel, Single Face, Green Letters, Mirror Background
- WG-16.5LX14.0WX6.0D = Wireguard, Length: 16.5", Width: 14", Depth: 6"
- WG-20.0LX19.0WX9.0D = Wireguard, Length: 20", Width: 19", Depth: 9"
- WG-26.0LX19.0WX9.0D = Wireguard, Length: 26", Width: 19", Depth: 9"

SPECIFICATIONS

CONSTRUCTION

- Attractive, low profile satin extruded aluminum with matching gray end-caps.
- Clear acrylic, edge-lit lens is provided for single faced signs while mirrored background is standard for double faced signs.

ARROWS

- NFPA-Type, universal field installable, self-adhesive chevrons

LETTERS

- 6" high; 0.75" stroke

APPROVALS

- UL924
- CEC Title 20 Compliant
- NFPA 101 Life Safety Code
- NEC NFPA 70
- OSHA

TEMPERATURE RATING

- From 50°F to 104°F

WEIGHT


- 3.2 lb

WARRANTY



- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.

DIMENSIONS

Surface End Mount

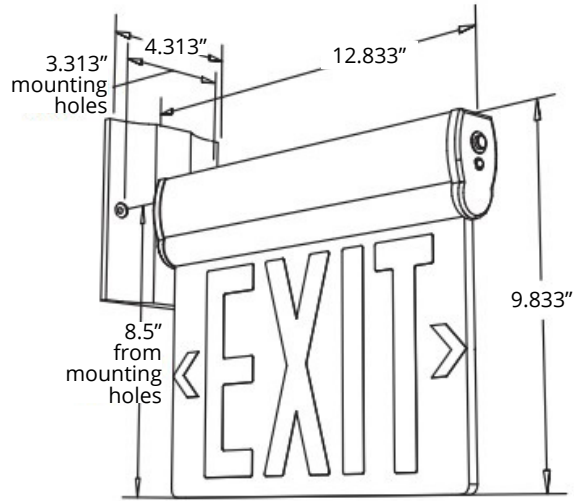

Surface Ceiling Mount

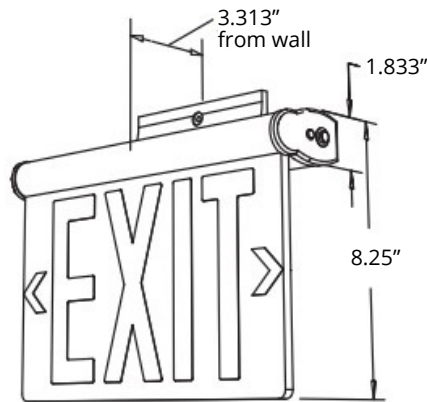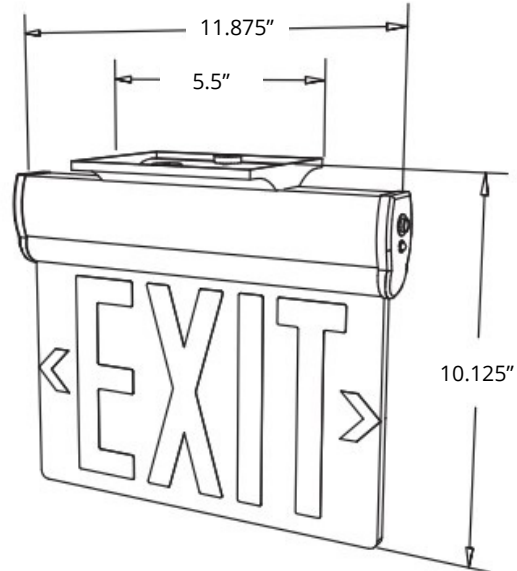

Surface Wall Mount



Sloped Ceiling Mount