

HNR

NEMA 4X Exit & Emergency Combo

Up to 1821 lumens per head

Surface, ceiling, or wall mount

Ideal for high ceilings and long tunnels Stainless steel swivel for precise Illumination Designed to fit most standard junction boxes

Fully gasketed for protection in wet and dusty environments

PROJECT

•

FEATURES

NEMA 4X rating

DATE:

COMMENTS:

ORDERING INFORMATION HNR-BK-1-L12

1. SERIES	2. HOUSING COLOR	3. HEAD COUNT	4. LAMP SOURCE
HNR	- ВК		-
	BK Black	 One Head Two Heads 	L12 LED 12V L24 LED 24V
ACCESSORIES; ORDER	SEPARATELY		

WG 9 = Wire guard 12.0" X 9.0" X 9.0"

SPECIFICATIONS

CONSTRUCTION

DIMENSIONS


- Die-Cast aluminum head
- Resilient gasketing enables unit to withstand exposure to moisture and corrosive elements
- Glass lens will not yellow over time

APPROVALS

- NEMA 4X
- IP66
- UL924
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA .

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

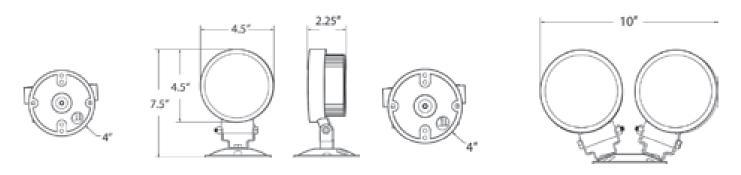

LAMP CHARTS

L - LED			
24V			
L24			