



HR

Class 1 Div 2 LED Remote Lamp Head

DATE:

COMMENTS:

PROJECT:



FEATURES

- Rated for Class 1 Division 2 Groups A-D.
- IP66 rated for use in wet and damp applications.
- 6V/12V DC input
- One or two fully adjustable 3.3W LED lamp heads.
- Compatible with HC exit and emergency combo and HE emergency light.



ORDERING INFORMATION *HR-1-G*

1. SERIES

HR

2. HEAD COUNT

-
- 1 1 Lamp
- 2 2 Lamps

3. MOUNTING

-
MTEB Top/End/Back Mount

4. OPTIONS

-
TP Tamper Proof

SPECIFICATIONS

CONSTRUCTION

- Reinforced fiberglass in gray finish.
- Corrosion and impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

ILLUMINATION

- Two fully adjustable LED, ultra bright 3.3W high performance with MR16 base.

MOUNTING

- Die-cast mounting brackets for surface wall mount.

TEMPERATURE RATING

- From -4°F to 122°F (-20°C to 50°C)
- **With HX:** -4°F to 122°F (-20°C to 50°C)

APPROVALS


- UL 924
- UL 924 Wet Location
- NFPA Life Safety Code 101
- CEC Title 20 Compliant
- Class I Div 2 Groups A-D
- NFPA 70-NEC
- OSHA
- IP66

WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

1 LAMP

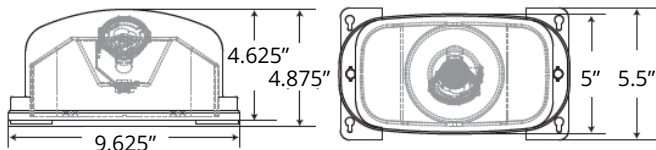

2 LAMPS

