



LLC

Floor-Proximity Exit/Emergency Combo

DATE:

PROJECT

COMMENTS:



FEATURES

- Long-lasting, efficient, ultra-bright white LED light strip.
- Specification-grade, low-profile thin plastic design is ideal for low-level applications.
- Dual voltage (120/277VAC)
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to- test switch for mandated code compliance testing.
- 3.6V long-life, maintenance-free, rechargeable Ni-Cad battery.
- Internal solid-state transfer switch automatically connects the internal battery to the Red/Green LED board and the White LED light strip for a minimum of 90 minutes of emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ORDERING INFORMATION *LLC-EM-G-1-WH-MB*

1. SERIES	2. OPERATION	3. ILLUMINATION	4. FACE COUNT	5. FRAME COLOR
LLC	EM EM Ni-Cad Battery Backup	G Green R Red	1 1 Single	BK Black WH White
6. MOUNTING	MB MB Back Mount			

SPECIFICATIONS

CONSTRUCTION

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant thermoplastic.

LETTERS

- 6.0" high; 0.75" stroke

ARROWS

- Snap-out, field selectable chevrons.

ILLUMINATION

- 3.1W (24 LEDs x 0.13W) per light strip.

MOUNTING

- Universal knockout pattern on back plate for wall mount.

TEMPERATURE RATING

- From 32°F to 122°F (0°C to 50°C)


APPROVALS

- UL 924
- CEC Title 20 Compliant
- NFPA Life Safety Code 101
- NEC
- OSHA
- UL Listed for Damp Location
- Suitable for use in floor proximity installation

WARRANTY

Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.

DIMENSIONS

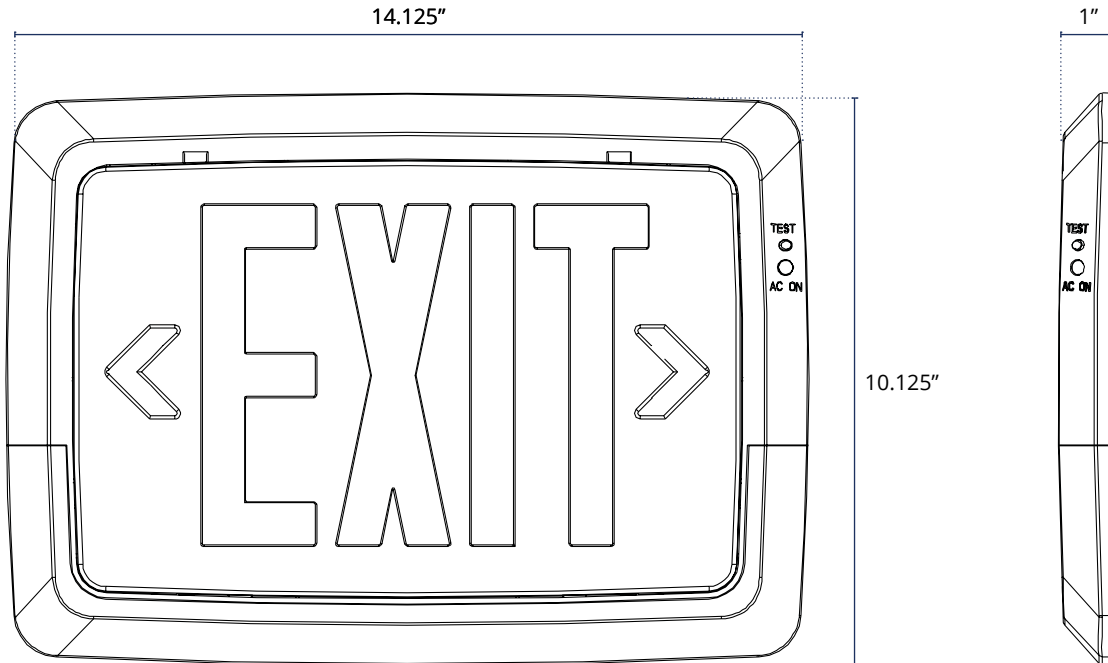

ELECTRICAL INFORMATION

INPUT WATTS (W)		INPUT AMPS (A)	
120V	277V	120V	277V
1.2	1.2	0.092	0.092