

## LP2H

Steel Exit & Emergency Combo

DATE:

PROJECT

COMMENTS:

### FEATURES

- PAR 18 style thermoplastic heads
- Attractive, contemporary steel housing design
- Universal face available
- Energy efficient high output LEDs
- Sealed External Momentary test switch and dual diagnostic LED indicator display
- AC presence and Hi-Charge status
- Maintenance-free, sealed nickel cadmium batteries provide at least 90 minutes of emergency run-time
- Line latch prevents unnecessary discharge of battery during installation — loads will not illuminate until after application of utility power
- Short circuit battery protection
- Brownout detection ensures emergency operation during periods of low line voltage
- 120/277 VAC field selectable inputs (with the exception of the TD (Time Delay) option which requires voltage specification upon ordering)



### ORDERING INFORMATION *LP2H-LC-12V27W-G-2-WH-MB-2-BRH-L65*

1. SERIES	2. OPERATION TYPE	3. OPERATION	4. ILLUMINATION	5. FACE COUNT	6. FRAME COLOR						
<b>LP2H</b>	-	-	-	-	-						
	<b>LC</b> Lead Calcium Battery Backup	<table border="1"> <tr> <td>6V12W 6 Volts, 12 Watts</td> <td>6V36W 6 Volts, 36 Watts</td> </tr> <tr> <td>6V18W 6 Volts, 18 Watts</td> <td>12V27W 12 Volts, 27 Watts</td> </tr> <tr> <td>6V27W 6 Volts, 27 Watts</td> <td>12V36W 12 Volts, 36 Watts</td> </tr> </table>	6V12W 6 Volts, 12 Watts	6V36W 6 Volts, 36 Watts	6V18W 6 Volts, 18 Watts	12V27W 12 Volts, 27 Watts	6V27W 6 Volts, 27 Watts	12V36W 12 Volts, 36 Watts	<b>G</b> Green <b>R</b> Red	<b>1</b> Single <b>2</b> Double <b>U</b> Universal	<b>WH</b> White <b>BK</b> Black
6V12W 6 Volts, 12 Watts	6V36W 6 Volts, 36 Watts										
6V18W 6 Volts, 18 Watts	12V27W 12 Volts, 27 Watts										
6V27W 6 Volts, 27 Watts	12V36W 12 Volts, 36 Watts										
	<b>NC</b> Ni-Cad Battery Backup	<table border="1"> <tr> <td>6V22W 6 Volts, 22 Watts</td> <td>12V42W 12 Volts, 42 Watts</td> </tr> <tr> <td>6V42W 6 Volts, 42 Watts</td> <td></td> </tr> </table>	6V22W 6 Volts, 22 Watts	12V42W 12 Volts, 42 Watts	6V42W 6 Volts, 42 Watts						
6V22W 6 Volts, 22 Watts	12V42W 12 Volts, 42 Watts										
6V42W 6 Volts, 42 Watts											
7. MOUNTING	8. HEAD COUNT	9. HEAD STYLE	10. LAMP SOURCE	11. OPTIONS							
<b>MTEB</b> Top/End/Back Mount <b>MPAB</b> 12" Swivel Mount (Black) <b>MPABA</b> 12" Swivel Mount (Brushed Aluminum) <b>MPAW</b> 12" Swivel Mount (White)	<b>0</b> Zero Lamps <b>1</b> One Lamp <b>2</b> Two Lamps	<b>BRH</b> BRH Lamp Heads <b>LRH</b> LRH Lamp Heads <b>XRH</b> XRH Lamp Heads	See Lamp Chart for Part # Example: Halogen Single Head 12V 12W = "H1212"	<b>BLANK = NO OPTION</b> <b>SD</b> Self-Diagnostics <b>AA</b> Audible Alarm (Buzzer) <b>FL</b> Flasher <b>AM</b> Ammeter <b>FA</b> Fire Alarm Interface <b>TD1</b> Time Delay - 120 VAC (15 min.) <b>TD2</b> Time Delay - 277 VAC (15 min.) <b>VM</b> Voltmeter							

### ACCESSORIES; ORDER SEPARATELY

- WG 1 = Wire guard 17.0" X 17.0" X 17.0"
- WG 10 = Wire guard 13.5" X 12.0" X 16.5"



### CONSTRUCTION

- Durable, 20 gauge steel

### LETTERS

- 6.0" height; 0.75" stroke

### ARROWS

- NFPA-Type, universal field selectable chevrons

### TEMPERATURE RATING

- From 50°F to 104°F


### APPROVALS

- CSA-US listed
- NFPA 101 Life Safety Code
- NFPA 70 - NEC
- OSHA

### WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

### DIMENSIONS

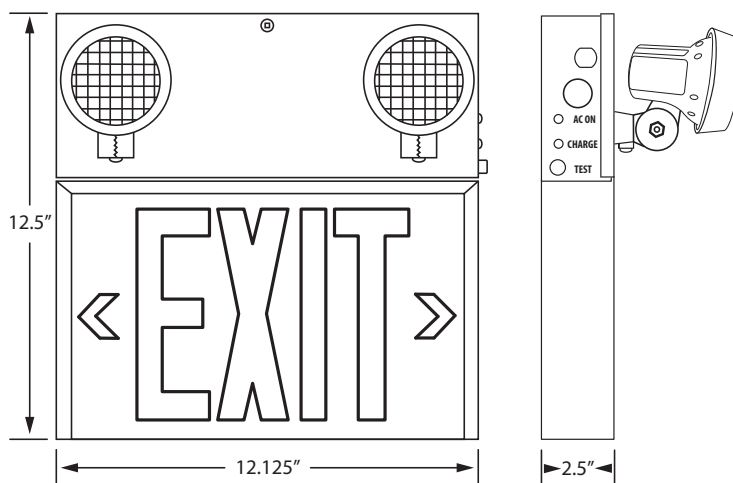

### LAMP CHARTS

B - BI-PIN HALOGEN		
	6V	12V
8W	B68	B128
10W	B610	
12W	B612	B1212
20W	B620	B1220
35W		B1235

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127

M - MR16		
	6V	12V
6W	M66	
10W	M610	M1210
12W		M1212
20W		M1220
35W		M1235