

DATE:

PROJECT

COMMENTS:



FEATURES

- IP66 rated, suitable for NEMA 4X applications
- Certified NSF Standard 2 — meets the rigorous sanitation, electrical safety and performance requirements of food service environments
- Intertek verified splash zone listed
- Designed to stand up to abuse in applications such as schools, institutions, public areas, and apartment complexes where vandalism may occur
- Stencil protected by 0.125" impact-resistant polycarbonate shield
- Sealed External Momentary test switch and dual diagnostic LED indicator display AC and Hi-Charge status
- Maintenance-free, sealed nickel cadmium batteries provide a minimum of 90 minute emergency run-time
- Line latch prevents unnecessary discharge of battery during installation — loads will not illuminate until after application of utility power
- Short circuit battery protection
- Brownout detection ensures emergency operation during periods of low line voltage
- 120/277 VAC field selectable inputs
- Remote Lamp Capable
- BAA Compliant



ORDERING INFORMATION

1. SERIES	2. OPERATION	3. ILLUMINATION	4. FRAME COLOR	5. MOUNTING
MAX-C	-	-	-	-
	6V42W 6 Volts, 42 Watts 12V42W 12 Volts, 42 Watts	G Green R Red	BK Black WH White	MB Back Mount MT Top Mount MTEB Top/End/Back Mount MPAB 12" Swivel Mount (Black) MPABA 12" Pendant Mount (Brushed Aluminum) MPAW 12" Swivel Mount (White)
6. LAMP SOURCE	7. OPTIONS			
See Lamp Chart for Part # Example: Halogen Single Head 12V 12W = "H1212"	BLANK = NO OPTION SD Self Diagnostics			

ACCESSORIES; ORDER SEPARATELY

- **WG 5** = Wire guard 15.75" X 14.75" X 6.75"



CONSTRUCTION

- Heavy-duty 0.420" cast aluminum
- Lamp housing constructed of vandal resistant polycarbonate
- Durable white or black powder coat finish

LETTERS

- 6.0" height; 0.75" stroke.

ARROWS

- NFPA-Type, universal field selectable chevrons

TEMPERATURE RATING

- From 50°F to 104°F


APPROVALS

- CSA-US listed
- Meets or exceeds UL 924 standards
- IP66
- NFPA 101 Life Safety Code
- NFPA 70 - NEC
- OSHA
- BAA Compliant

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

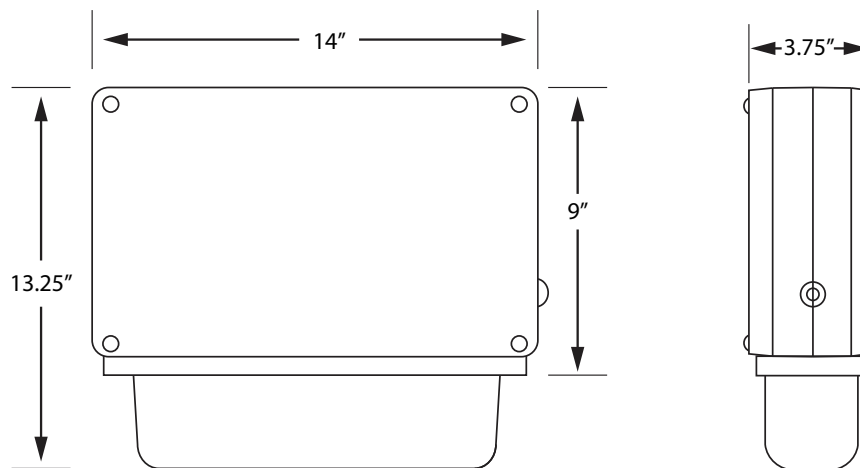

LAMP CHARTS

M - MR16		
	6V	12V
20W		M1220

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127