



MAX-C

Wet Location LED Exit & Emergency Combo

DATE:

PROJECT

COMMENTS:

FEATURES

- IP66 rating makes this suitable for wet location applications.
- Certified NSF Standard 2 — meets the rigorous sanitation, electrical safety, and performance requirements of food service environments.
- Intertek verified splash zone listed to ensure no damage is done in an environment where it may get splashed with liquids.
- Designed to stand up to abuse in applications for schools, institutions, public areas, apartments, and security/prison applications where vandalism may occur.
- Stencil is protected by 0.125" impact-resistant polycarbonate shield.
- Sealed external momentary test switch and dual diagnostic LED indicator displays AC presence and Hi-Charge status.
- Maintenance-free, sealed nickel cadmium batteries provide a minimum of 90 minute emergency run-time with short circuit protection.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Brownout detection ensures emergency operation during periods of low line voltage.
- 120/277 VAC with field selectable inputs.
- Exit sign is compatible with remote lamp heads.



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS
Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION MAX-C-6V42W-G-BK-MB

1. SERIES	2. OPERATION	3. ILLUMINATION	4. FRAME COLOR	5. MOUNTING
MAX-C	-	-	-	-
	6V42W 6 Volts, 42 Watts 12V42W 12 Volts, 42 Watts	G Green R Red	BK Black WH White	MB Back Mount MT Top Mount MTEB Top/End/Back Mount MPAB 12" Swivel Mount (Black) MPAW 12" Swivel Mount (White)
6. LAMP SOURCE	7. OPTIONS			
See Lamp Chart for Part # Example: LED Single Head 12V 5W = "L125"	BLANK = NO OPTION SD Self Diagnostics LT Low Temperature (-40°F to 104°F)			

ACCESSORIES; ORDER SEPARATELY

- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

SPECIFICATIONS

CONSTRUCTION

- Heavy-duty 0.420" cast aluminum
- Lamp housing constructed of vandal resistant polycarbonate.
- Durable white or black powder coat finish

LETTERS

- 6.0" height; 0.75" stroke

ARROWS

- NFPA-type, universal field selectable chevrons.

TEMPERATURE RATING

- From 50°F to 104°F
- If LT option is selected temperature rating can range from -40°F to 104°F.


APPROVALS

- CSA-US listed
- Meets or exceeds UL 924 standards
- IP66
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- BAA Compliant

WARRANTY

Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

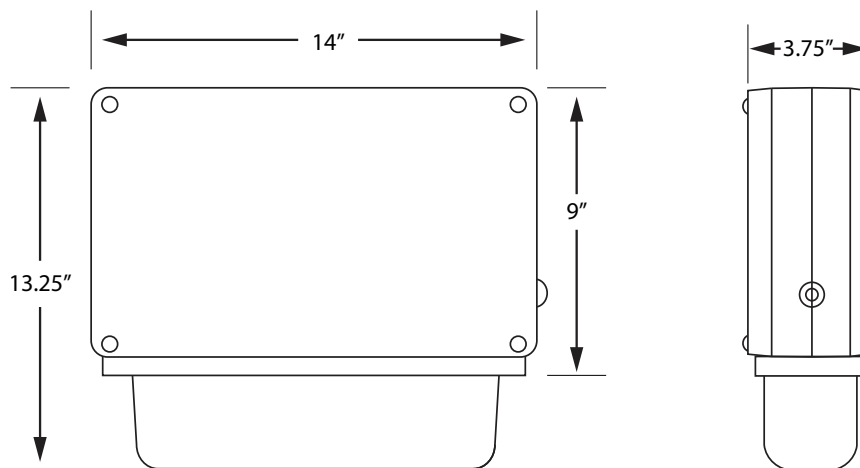

LAMP CHARTS

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127

LAMP SPACING

UNIT SPACING - 9 FT MOUNTING HEIGHT	
LAMP WATTAGE	SPACING (MULTIPLE UNITS)
2W	50'
5W	60'
7W	100'