

DATE:

COMMENTS:

PROJECT



## FEATURES

- IP66 rated, suitable for NEMA 4X applications
- Certified NSF Standard 2 — meets the rigorous sanitation, electrical safety and performance requirements of food service environments
- Intertek verified splash zone listed
- Designed to stand up to abuse in applications such as schools, institutions, public areas, and apartment complexes where vandalism may occur
- Stencil protected by 0.125" impact-resistant polycarbonate shield
- Sealed External Momentary test switch and dual diagnostic LED indicator display AC and Hi-Charge status
- Maintenance-free, sealed nickel cadmium batteries provide a minimum of 90 minute emergency run-time
- Line latch prevents unnecessary discharge of battery during installation — loads will not illuminate until after application of utility power
- Short circuit battery protection
- Brownout detection ensures emergency operation during periods of low line voltage
- 120/277 VAC field selectable inputs



## ORDERING INFORMATION

1. SERIES	2. OPERATION	3. ILLUMINATION	4. FRAME COLOR	5. MOUNTING
<b>MAX-C</b>	-	-	-	-
	<b>6V42W</b> 6 Volts, 42 Watts <b>12V42W</b> 12 Volts, 42 Watts	<b>G</b> Green <b>R</b> Red	<b>BK</b> Black <b>WH</b> White	<b>MB</b> Back Mount <b>MT</b> Top Mount <b>MTEB</b> Top/End/Back Mount <b>MPAB</b> 12" Swivel Mount (Black) <b>MPABA</b> 12" Pendant Mount (Brushed Aluminum) <b>MPAW</b> 12" Swivel Mount (White)
6. LAMP SOURCE	7. OPTIONS			
See Lamp Chart for Part # Example: Halogen Single Head 12V 12W = "H1212"	<b>BLANK = NO OPTION</b> <b>SD</b> Self Diagnostics			

## ACCESSORIES; ORDER SEPARATELY

- **WG 5** = Wire guard 15.75" X 14.75" X 6.75"

## CONSTRUCTION

- Heavy-duty 0.420" cast aluminum
- Lamp housing constructed of vandal resistant polycarbonate
- Durable white or black powder coat finish

## LETTERS

- 6.0" height; 0.75" stroke.

## ARROWS

- NFPA-Type, universal field selectable chevrons

## TEMPERATURE RATING

- From 50°F to 104°F

## APPROVALS


- CSA-US listed
- Meets or exceeds UL 924 standards
- IP66

- NFPA 101 Life Safety Code
- NFPA 70 - NEC
- OSHA

## WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

## DIMENSIONS

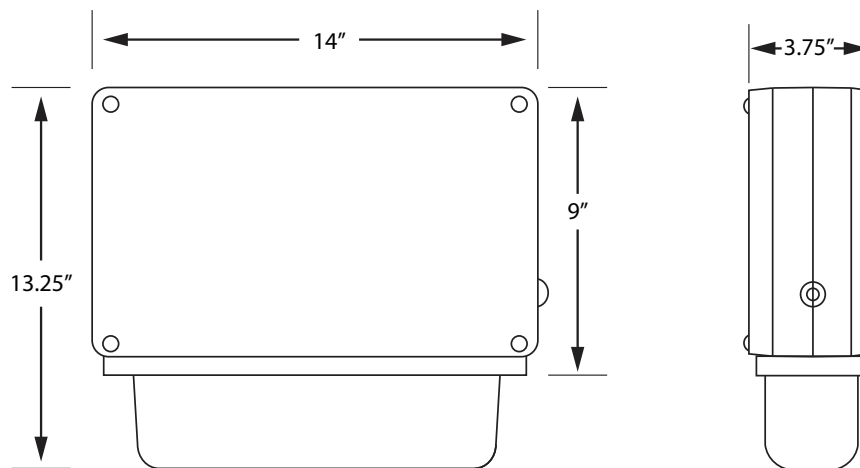

## LAMP CHARTS

M - MR16		
	6V	12V
6W	M66	
10W	M610	M1210
20W		M1220

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127