



RLP

Damp Location Thermoplastic Pipe Exit & Emergency Combo

DATE:	COMMENTS:
PROJECT:	

FEATURES

- Damp location listed
- Exceptionally low energy consumption LED light source with 10+ year life expectancy and output of 184 lumens.
- Mounting options include back, ceiling, end, or pendant mounting.
- Remote capability allows for 2W of remote head capacity.
- Compatible with Isolite MVH and MVI remote heads.
- Available with full self-diagnostic option.
- Dual rate charger recharges battery in 24 hours.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Integral AC present indicator, push-to-test switch, and reliable solid state transfer relay is standard.
- Two nickel cadmium batteries provide 90 minute emergency run-time.
- Electronic control circuit and isolation transformer provide current control and circuit protection, ensuring optimum LED efficiency and life.
- 120/277 VAC with field selectable inputs.



ORDERING INFORMATION *RLP-G-U-BK-MTEB*

1. SERIES	2. ILLUMINATION	3. FACE COUNT	4. FRAME COLOR	5. MOUNTING	6. OPTIONS
RLP	-	U	-	MTEB	-
	G Green R Red	U Universal	BK Black WH White	MTEB Top/End/Back/Mount	BLANK = NO OPTION SD Self-Diagnostics

ACCESSORIES; ORDER SEPARATELY

- **WG-16.5LX14.0WX3.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 3"
- **WG-16.5LX14.0WX6.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 6"
- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

NOTE: Wireguards only available with Back Mount.

SPECIFICATIONS

CONSTRUCTION

- Snap together, quick fit installation
- Injection molded, 5VA flame retardant, high impact thermoplastic housing in white or black finish.

LETTERS

- 6.0" high; 0.75" stroke

ARROWS

- NFPA-type, field selectable chevrons.

TEMPERATURE RATING

- From 32°F to 104°F

APPROVALS

- UL 924
- UL Listed for Damp Location
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- CEC Title 20 Compliant


TEMPERATURE RATING

- From 32°F to 104°F

WARRANTY

Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

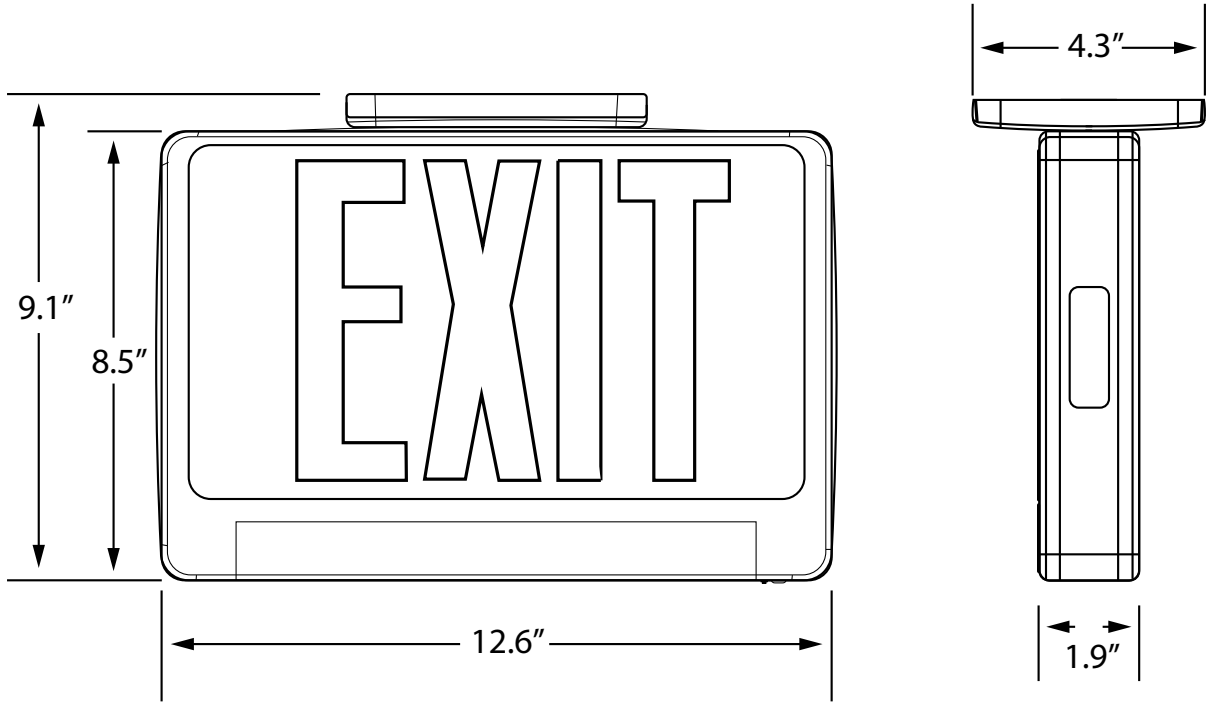

LAMP SPACING

MOUNTING HEIGHT	CENTER-TO-CENTER SPACING
6.0'	12'
6.5'	11'
7.0'	10'
7.5'	10'