



WXPM

Mini Outdoor Emergency Light

DATE:

PROJECT

COMMENTS:



FEATURES

- Architecturally appealing wet location LED light for outdoor applications.
- Built to last with a durable die-cast design and anti-UV coating.
- Suitable for extreme conditions with -22°F to 122°F temperature rating.
- Full cutoff light distribution minimizes glare and maximizes coverage.
- Designed for quick and easy installation.
- Remote option offers field selectable power with 1W, 2W and 3W options.



ORDERING INFORMATION *WXPM-AC-BZ*

1. SERIES

WXPM

2. OPERATION

AC AC Only
EM Battery Backup
REM 3-12VDC Remote Lamp

3. HOUSING COLOR

BK Black
BZ Bronze
WH White

SPECIFICATIONS

CONSTRUCTION

- Die-cast aluminum housing
- UV resistant powder-coated finish
- Polycarbonate lens

MOUNTING

- Wall mount with 90° full cutoff light distribution.

TEMPERATURE RATING

- -22°F to 122°F (-30°C to 50°C)


APPROVALS

- UL Listed to standard UL 924 & CAN/ULC-S572
- NFPA 101 Life Safety Code
- IP65
- IK08

WARRANTY


Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.

DIMENSIONS

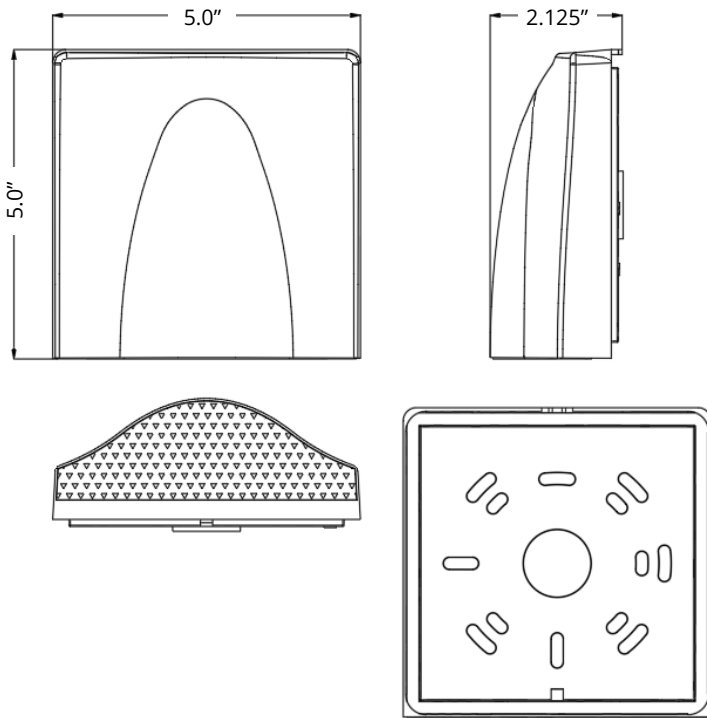

DRAWINGS

FIELD SELECTABLE POWER

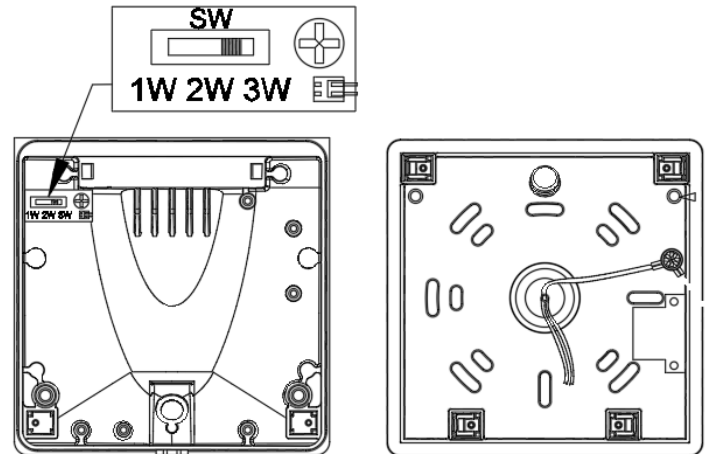

SPACING CHARTS

OPEN CORRIDOR - WALL MOUNT

- Room Dimensions: 80' Long x 6' Wide
- Reflectance: 80% Ceiling / 50% Wall / 20% Floor
- NFPA 101 Requirements: 40:1 Maximum/Minimum Ratio

Fixture: WXPM-REM-1W

MOUNTING HEIGHT (FT)	PATH OF EGRESS (FT - WIDE)	SPACING DISTANCE (FT)
7.5	3	14
	6	13
10	3	11
	6	10

Fixture: WXPM-REM-2W

MOUNTING HEIGHT (FT)	PATH OF EGRESS (FT - WIDE)	SPACING DISTANCE (FT)
7.5	3	25
	6	24
10	3	21
	6	20

Fixture: WXPM-REM-3W

MOUNTING HEIGHT (FT)	PATH OF EGRESS (FT - WIDE)	SPACING DISTANCE (FT)
7.5	3	31
	6	30
10	3	27
	6	26

Fixture: WXPM-EM

MOUNTING HEIGHT (FT)	PATH OF EGRESS (FT - WIDE)	SPACING DISTANCE (FT)
7.5	3	31
	6	30
10	3	24
	6	23

Fixture: WXPM-AC

MOUNTING HEIGHT (FT)	PATH OF EGRESS (FT - WIDE)	SPACING DISTANCE (FT)
7.5	3	50
	6	48
10	3	50
	6	48