



2040-01/07

Aluminum Frame Self-Luminous Exit

Features

- Requires no electricity or external light source.
- Tamper-proof design.
- Maintenance free – no lamps or batteries to replace.
- Easy to install – no wiring required.
- Ideal for damp, wet, explosion proof, and extreme temperature applications.
- Special wording and pictographs available.
- Service life – 10 or 20 year options available.

Construction

- Extruded aluminum frame.
- Painted extruded aluminum stencil

Letters

- 6" high; 0.75" stroke

Arrows

- Universal chevrons

Viewing Distance


- 100 foot visibility rating

Technology

- Isolite Self-Luminous Signs are illuminated with a light source that consists of glass tubes which are internally coated with phosphor and filled with tritium gas—a natural hydrogen isotope.



Ordering Information

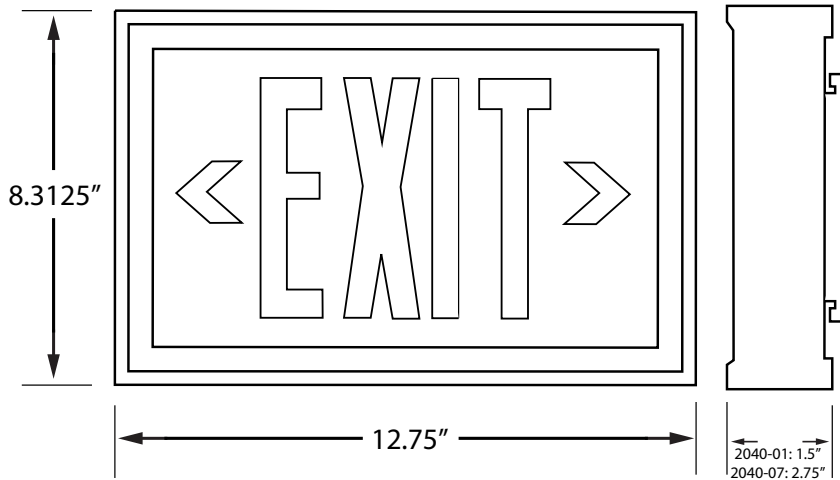

Series

- 2040-01 = Single
- 2040-07 = Double

Service Life

- 10 = 10 Years
- 20 = 20 Years

Mounting

- WM = Wall Mount
- SC = Surface Ceiling
- SE = Surface End

Face Color

- R = Red
- G = Green
- BK = Black
- BZ = Bronze

Frame Color

- WH = White
- BK = Black
- BA = Brushed Aluminum
- BZ = Bronze

Options

- CW = Custom Wording
- LX = Lexan Stencil Cover

Optional Mounting

- PA = 12" Swivel Pendant
- PB = 24" Swivel Pendant
- PC = 36" Swivel Pendant
- PD = 48" Swivel Pendant

Weight

- **Single Face:** 4 lb
- **Double Face:** 8 lb

Temperature Rating

- From -67°F to 176°F

Approvals

- UL Listed to standard UL924 & CAN/ULC-S572
- NFPA 101 Life Safety Code
- NEC Article 500, Class 1, 11, and 111 conditions

Warranty

- Our self-luminous products are warranted against any defects in material or workmanship for the rated life of the product. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.